

# FIRE ISOLATOR

## Datasheet FireBlanket Ultimate FI-BL0906

### Product description

The FireBlanket Ultimate FI-BL0906 can be used for normal, combustion-engined and EV car fires. It can be deployed in parking garages, parking lots, shopping malls, onboard ferries, etc. The blanket can be used for all car sizes from a small city car up to large SUV models.

The blanket isolates the fire, preventing further spread to avoid collateral damage, also minimizing the toxic vapor and gases. The blanket has an open weave structure, meaning it can 'breathe' to prevent buildup of gases under the blanket. The Fire Blanket is reusable and can be cleaned. It can stand peak temperatures of 1600 °C, and can withstand 1200 °C continuously. The Fire Blanket Ultimate FI-BL0906 is easy to deploy by 2 trained people, wearing PPE and SCBA.

### Pictures



### Dimensions & Specifications

Art. no: FI-BL0906  
Dimensions: 9 x 6 m\*  
Weight: 37 kg  
Material: 96,6% Highest quality Silica, eco friendly  
Temperature resistance: + 1600 °C peak  
Classification: DIN EN 13501-1 classified with A1 certificate by KIWA/ MPA, ASTM D6413 classified by HPL Engineering  
NFA701 by SGS, DIN SPEC 91489  
HS code: 70199000  
Usage: reusable

Also available in 2x2, 3x3, 5x5, 6x6, 7x7 and other custom-made sizes.


### Pictures



- Supplied in sturdy smartbag
- Cabinet available
- Big coloured loops for easy handling of the blanket
- Trolley and backpack available
- Suitable from small cars to large Pickups
- No expiration date, shelflife of 25 year+ if properly stored

\* The blanket has a tolerance of +/- 5% in width and length, which can be affected by temperature and moisture.

### Pictures

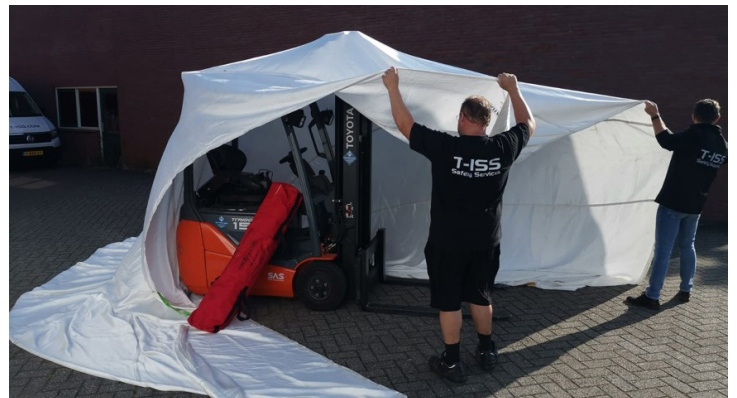

Visit our website:

**FIREISOLATOR.COM**